




Single Stage **Model HB-529L**

Hz	HP	kW	SCFM	Pressure		Vacuum		Noise Level	Net Weight	
				mbar	"H2O	mbar	"H2O		kg	lbs
60	3.5	2.6	220	250	100	220	88	77 dbA	33	73
50	3.0	2.2	188	230	92	230	92	72 dbA	33	73

*Refer to curves below for detailed performance data. Data subject to change, actual performance may vary by ±10%. Contact All Star™ Products to verify current data.

STANDARD FEATURES

- Housing - Aluminum
- Added seal for vacuuming water
- Impeller - high efficient design, dynamically balanced die cast aluminum
- Direct drive impeller
- Shock absorbing mounting base
- Quiet operation - well below OSHA maximum noise limits
- Inlet & outlet silencers included as standard
- Motor shaft seal standard
- IP 54 TEFC 2 pole squirrel cage ac motor
- 40 Deg C ambient
- Class H Insulation 1.15 service factor
- Standard voltage 3/60/208-230/460 3/50/220/380
- Performance tested ANSI/AMCA210-85 Laboratory Method


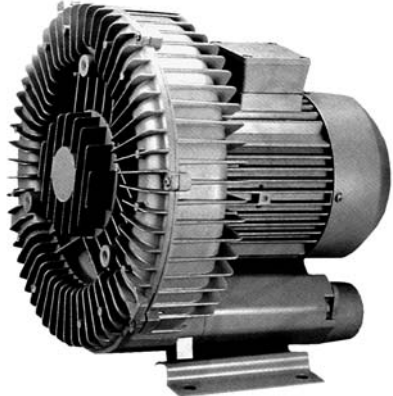


ACCESSORIES

- Pressure Relief Valve **RV-01** Pressure Filter **F231P-200**
- Vacuum Relief Valve **RV-01** Vacuum Filter **CSL-851-200HC**

TECHNICAL DATA

- Performance Temperature Curves
- CAD Files

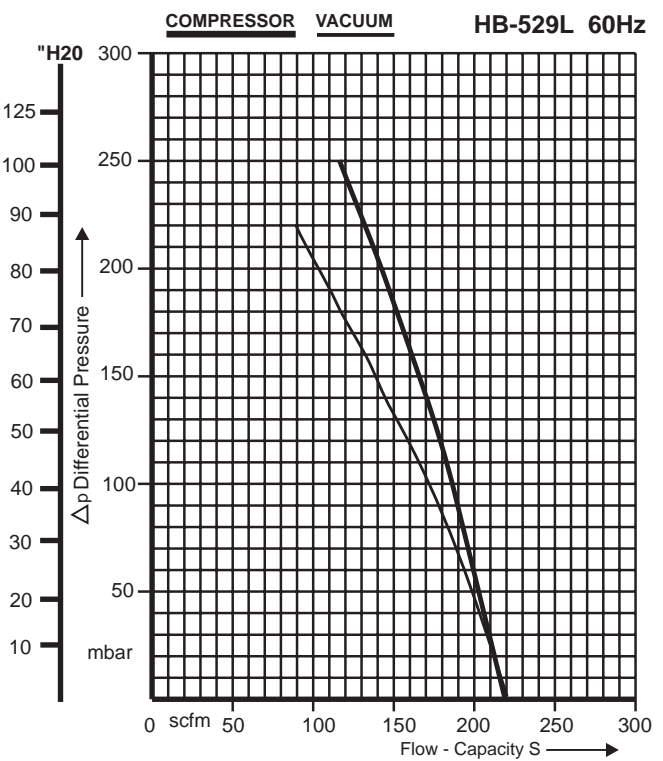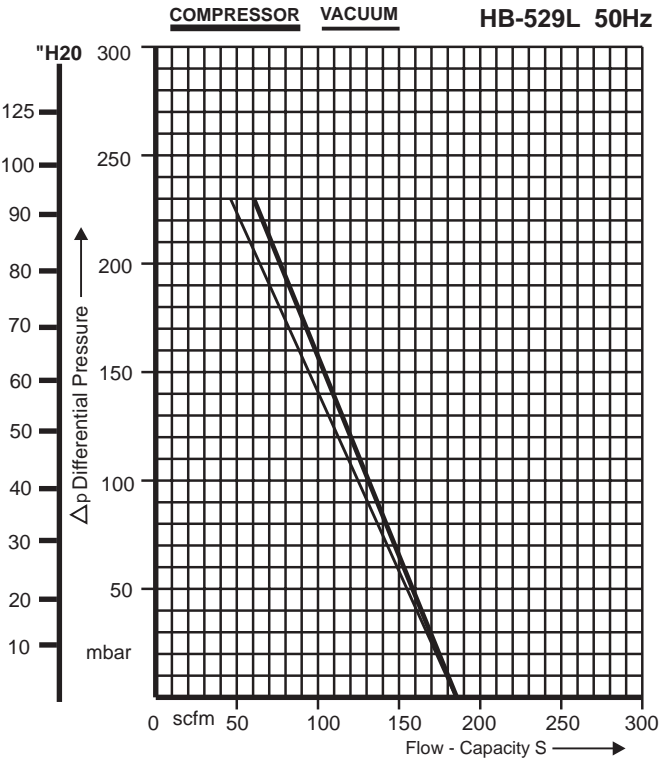



Register at <http://www.all-star-usa.com> for online services for current technical data, AutoCad drawings, competitive interchange tables, engineering and application information, order entry, check shipment status and new product information.




Engineered value since 1986. Visit us at <http://www.all-star-usa.com>

Effective April 15, 2005

HB-529L

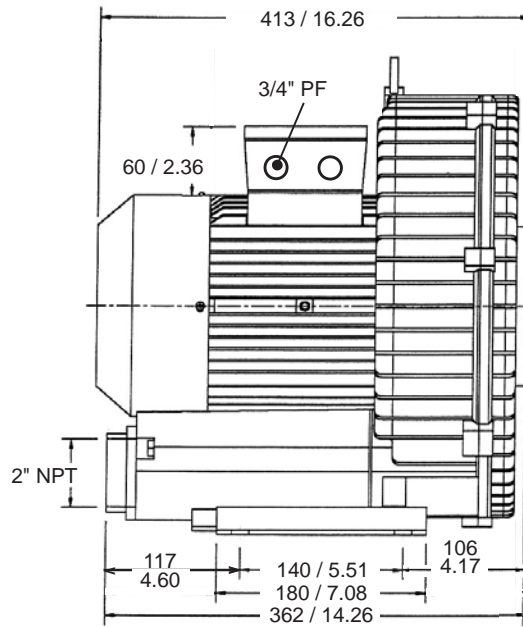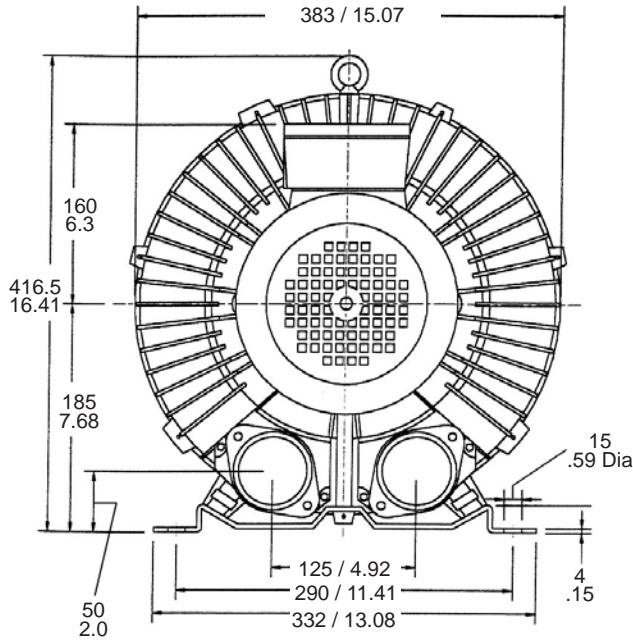

For blower parts, include the model number before the part number, eg: HB-129-001 for the impeller.

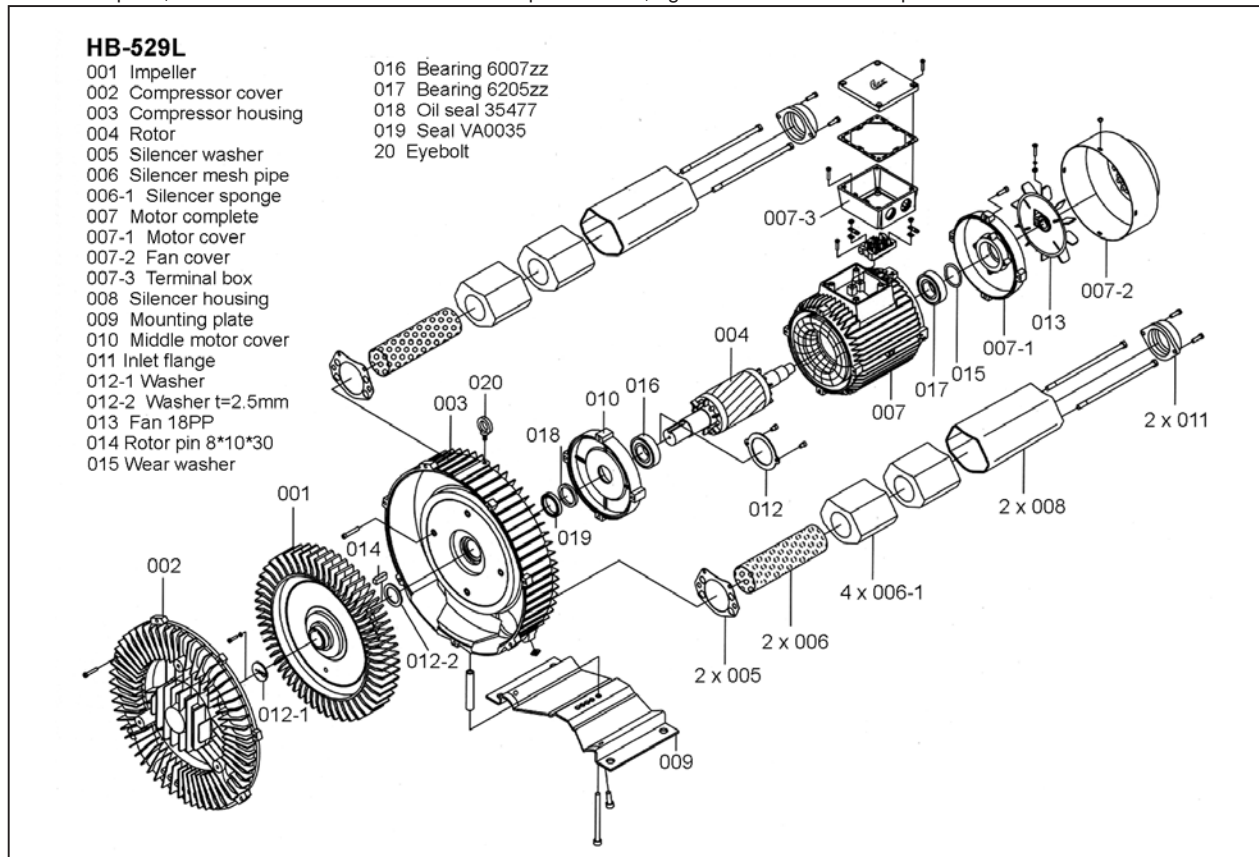

Contact an All Star representative, distributor or the closest All Star office below.