




**Two Stage** **Model HB-6375**

Hz	HP	kW	SCFM	Pressure		Vacuum		Noise Level	Net Weight	
				mbar	"H2O	mbar	"H2O		kg	lbs
60	11.5	8.5	220	660	265	450	181	79 dbA	75	165
50	10	7.5	185	595	239	415	167	75 dbA	75	165

\*Refer to curves below for detailed performance data. Data subject to change, actual performance may vary by ± 10%. Contact All Star™ Products to verify current data.



**STANDARD FEATURES**

- Housing - Aluminum
- Impeller - high efficient design, dynamically balanced die cast aluminum
- Direct drive impeller
- Shock absorbing mounting base
- Quiet operation - well below OSHA maximum noise limits
- Inlet & outlet silencers included as standard
- Motor input shaft seal standard
- IP 54 TEFC 2 pole squirrel cage ac motor
- 40 Deg C ambient
- UL component listed motor CE compliant
- Class H Insulation 1.15 service factor
- Standard voltage 3/60/208-230/460 & 3/50/220/380

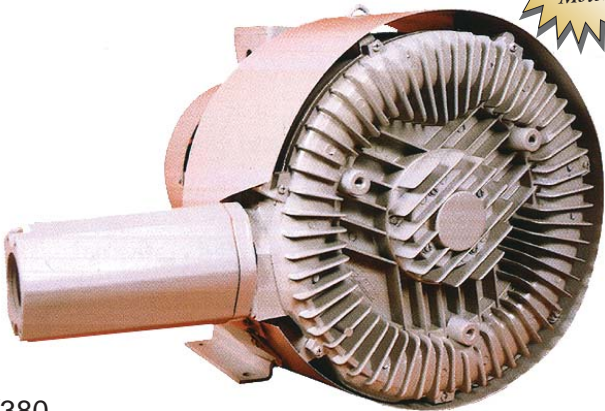

**OPTIONS & ACCESSORIES**

Refer to All Star™ Products for different kW motor sizes, enclosures, special voltages and variable speed open and closed loop systems.

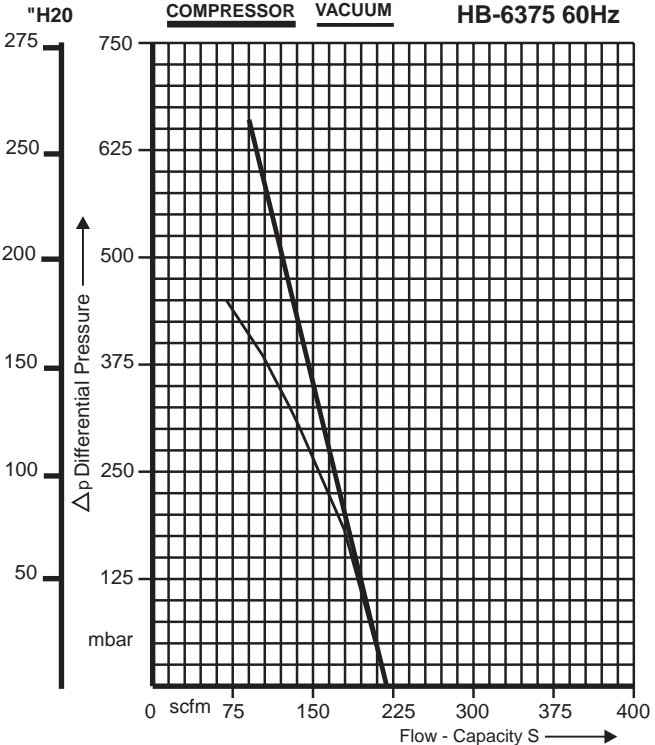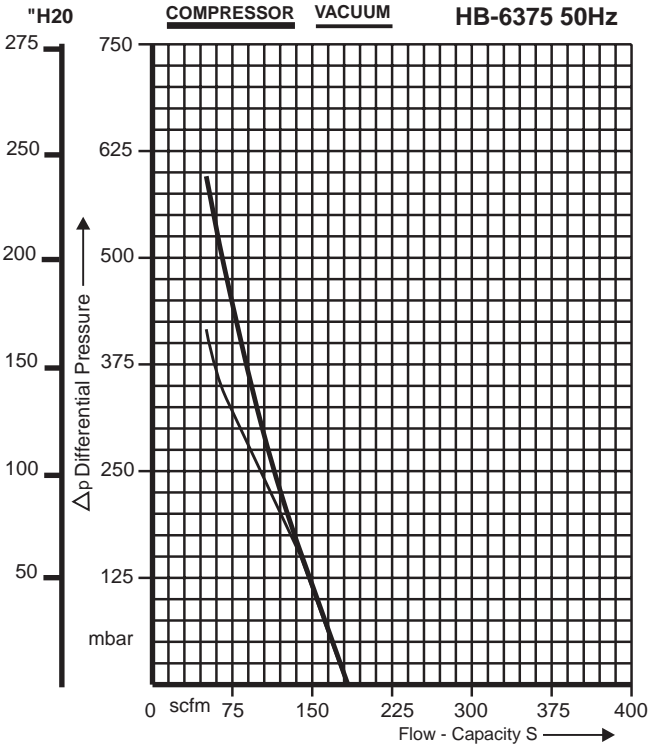

Register at <http://www.all-star-usa.com> for online services for current technical data, AutoCad drawings, competitive interchange tables, engineering and application information, order entry, check shipment status and new product information.

