



Model	RPM	Hz	HP	kW	SCFM	Pressure		Vacuum		Noise Level	Net Weight	
						mbar	"H2O	mbar	"H2O		kg	lbs
RB84	3450	60	11.5	8.5	600	150	60	170	68	81 db(A)		
	2850	50		7.5	515	150	60	165	66			
RB84	3450	60	17.5	13	600	265	106	260	104	81 db(A)		
	2850	50		11	515	265	106	260	104			

*Refer to curves below for detailed performance data. Data subject to change without notice. Actual performance may vary by ±10%.

STANDARD FEATURES

- Housing - Aluminum
- Impeller - Aluminum, dynamically balanced
- Direct drive impeller
- Shock absorbing mounting base
- Quiet operation - below OSHA limits
- Inlet & outlet silencers included
- Regreasable bearing
- 40 Deg C ambient
- Performance tested ANSI/AMCA210-85

NOTE: The RB84 replaces the HB-8401



ACCESSORIES

Note: To obtain warranty coverage on the blower a relief valve and filter are required.

- Pressure Intake Air Filter F245P-300
- Vacuum Air Filter CSL-335P-300

TECHNICAL DATA


[Available online www.all-star-usa.com]

- Performance Temperature Rise Curves
- AutoCad files
- Parts List



RoHS Compliant

PRESSURE DATA CURVES ±10%
[See reverse side for Vacuum Curves]

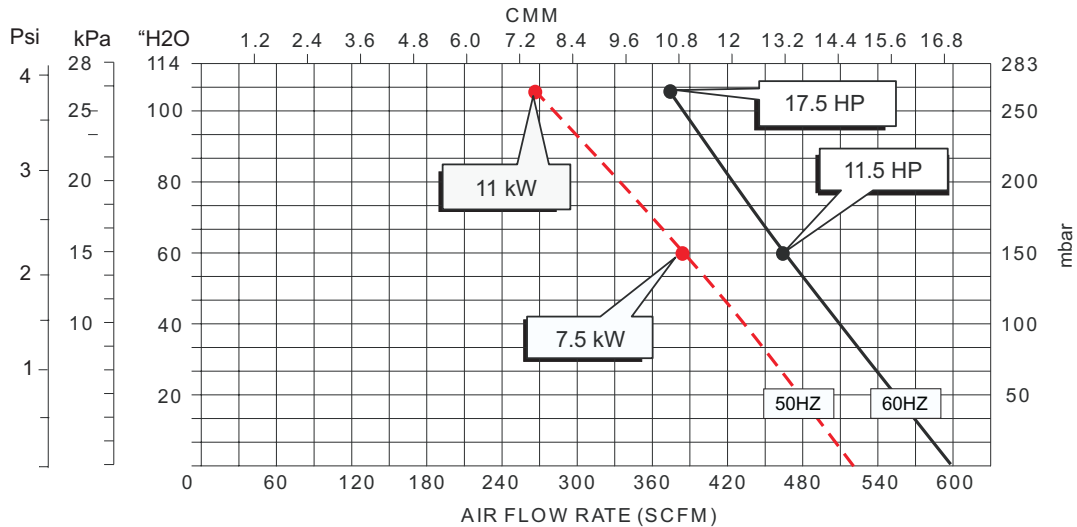



CONTACT ALL-STAR PRODUCTS

