



**Two Stage** **Model HB-8315**

Hz	HP	kW	SCFM	Pressure mbar	"H2O	Vacuum mbar	"H2O	Noise Level	Net Weight kg	lbs
60	17.5	13	385	600	241	455	183	81 dbA	142	314
50	15	11.5	339	600	241	430	173	76 dbA	142	314

\*Refer to curves below for detailed performance data. Data subject to change, actual performance may vary by ±10%. Contact All Star™ Products to verify current data.



**STANDARD FEATURES**

- Housing - Aluminum
- Impeller - high efficient design, dynamically balanced die cast aluminum
- Direct drive impeller
- Shock absorbing mounting base
- Quiet operation - well below OSHA maximum noise limits
- Inlet & outlet silencers included as standard
- Motor input shaft seal standard
- IP 54 TEFC 2 pole squirrel cage ac motor
- 40 Deg C ambient
- UL component listed motor CE compliant
- Class H Insulation 1.15 service factor
- Standard voltage 3/60/208-230/460 & 3/50/220/380



**OPTIONS & ACCESSORIES**



Refer to All Star™ Products for different kW motor sizes, enclosures, special voltages and variable speed open and closed loop systems.

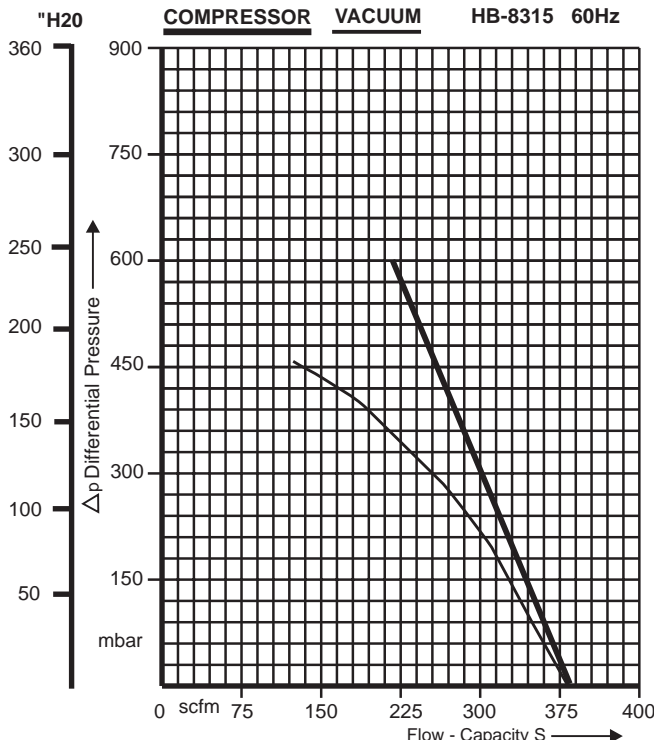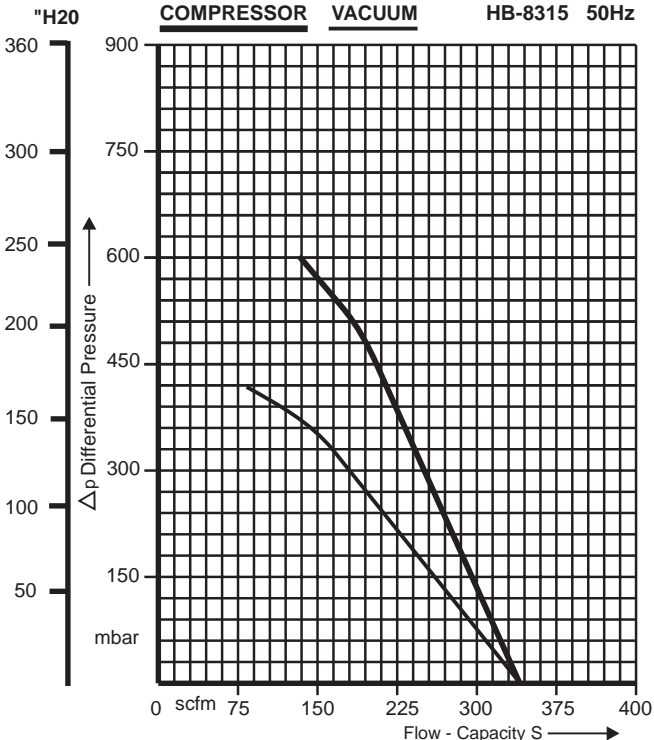


Register at <http://www.all-star-usa.com> for online services for current technical data, AutoCad drawings, competitive interchange tables, engineering and application information, order entry, check shipment status and new product information.



**HB-8315 HB-8320**

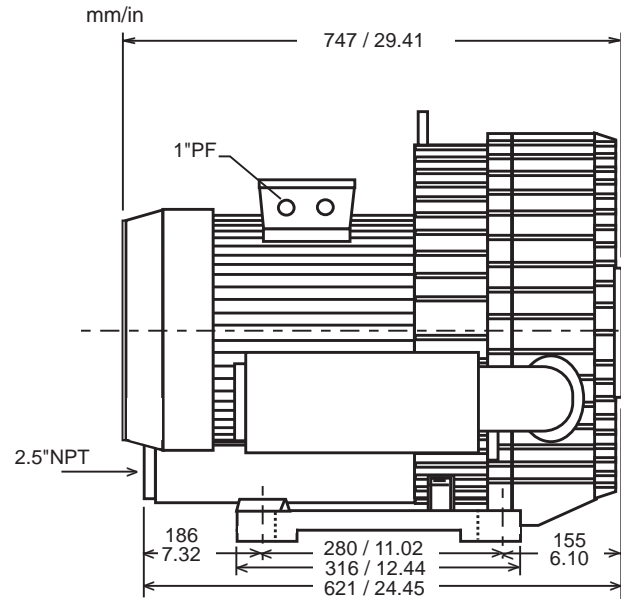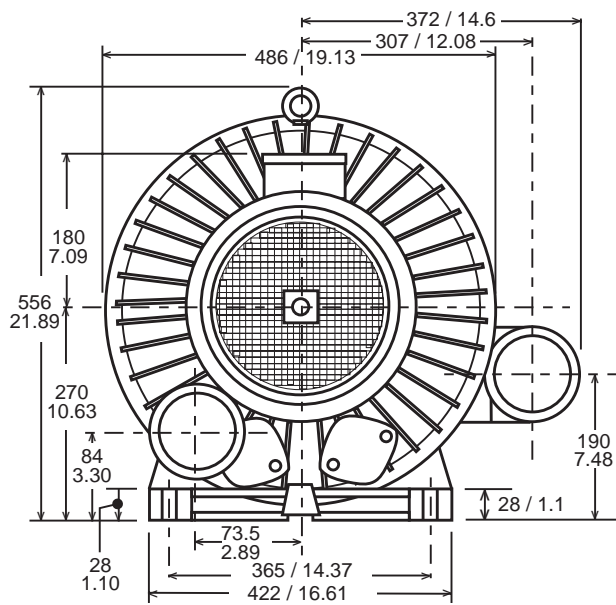

For blower parts, include the model number before the part number, eg: HB-129-001 for the impeller.

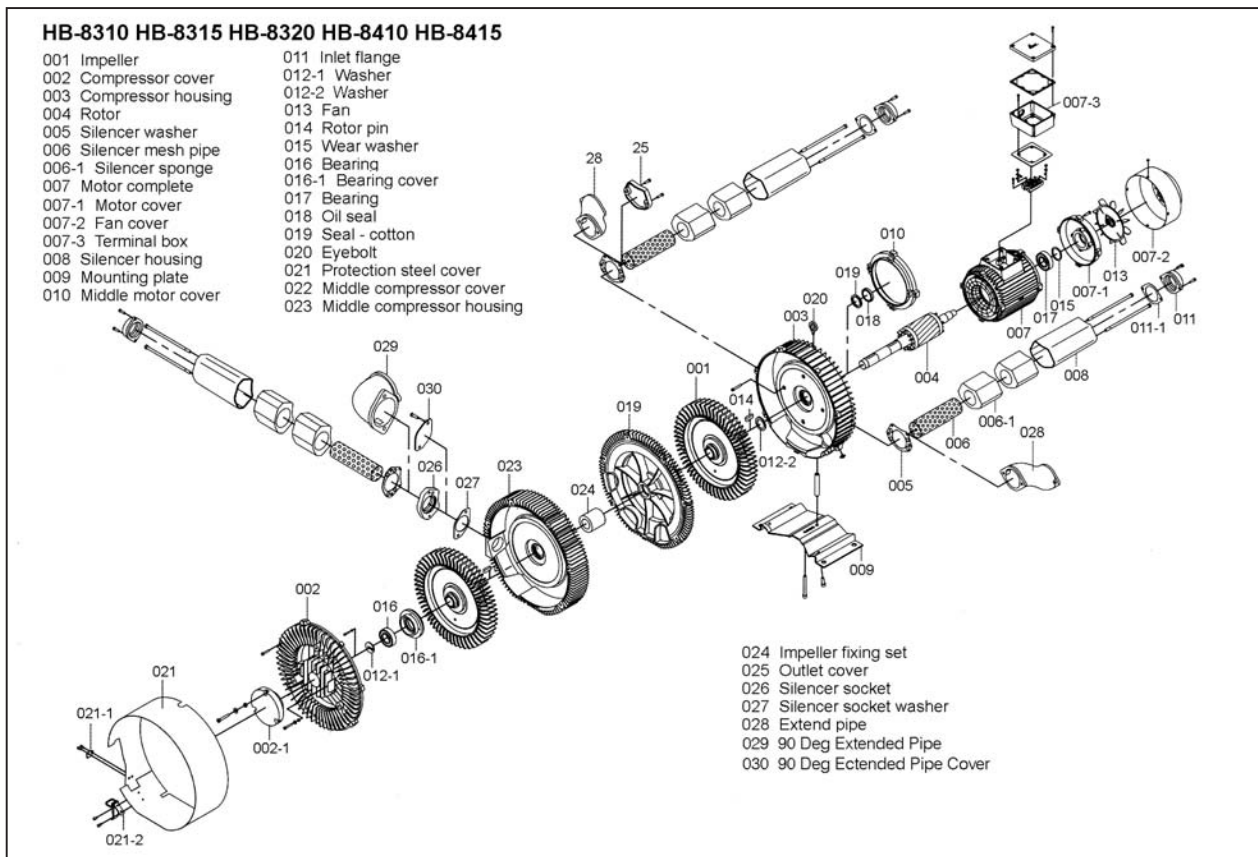

**Contact an All Star representative, distributor or the closest All Star office below.**